



Digital Transistors (Built-in Resistors)

DTA113ZVA DIGITAL TRANSISTOR (PNP)

FEATURE

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

PIN CONNENCTIONS and EQUIVALENT CIRCUIT

DTA113ZVA 	TO-92 1. GND 2. OUT 3. IN	Equivalent Circuit 
--	---	---







MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Symbol	Parameter	Limit	Unit
V_{CC}	Supply Voltage	-50	V
V_{IN}	Input Voltage	-10~+5	V
I_O	Output Current	-100	mA
P_D	Power Dissipation	625	mW
T_J	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C



ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC}=-5V, I_O=-100\mu A$	-0.3			V
	$V_{I(on)}$	$V_O=-0.3V, I_O=-20mA$			-3	V
Output voltage	$V_{O(on)}$	$I_O/I_I=-10mA/-0.5mA$			-0.3	V
Input current	I_I	$V_I=-5V$			-7.2	mA
Output current	$I_{O(off)}$	$V_{CC}=-50V, V_I=0$			-0.5	μA
DC current gain	G_I	$V_O=-5V, I_O=-5mA$	33			
Input resistance	R_1		0.7	1	1.3	k Ω
Resistance ratio	R_2/R_1		8	10	12	
Transition frequency	f_T	$V_O=-10V, I_O=-5mA, f=100MHz$		250		MHz

Typical Characteristics

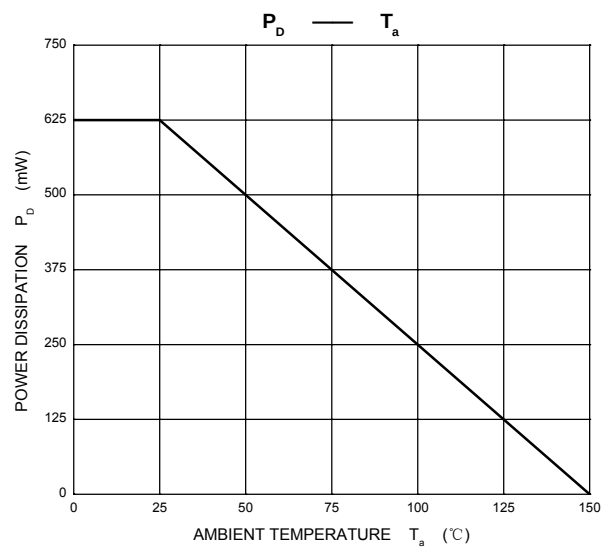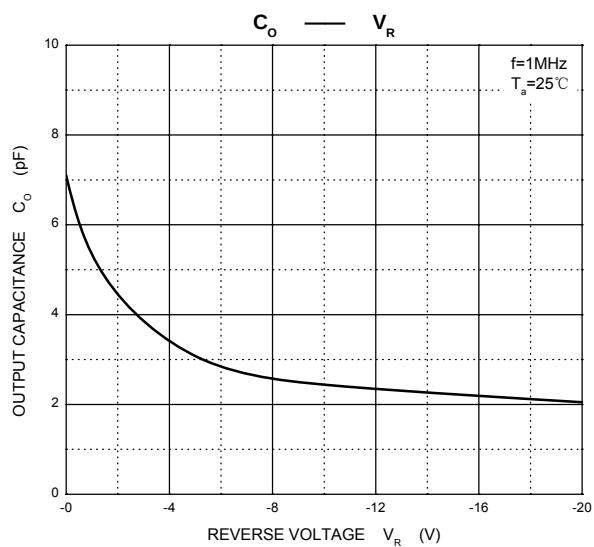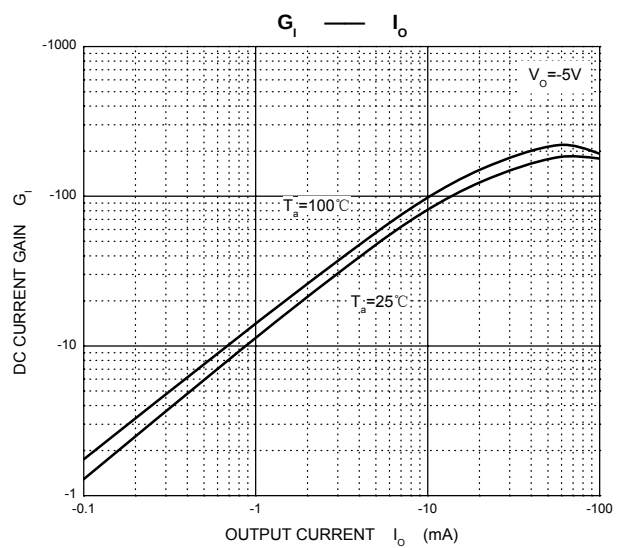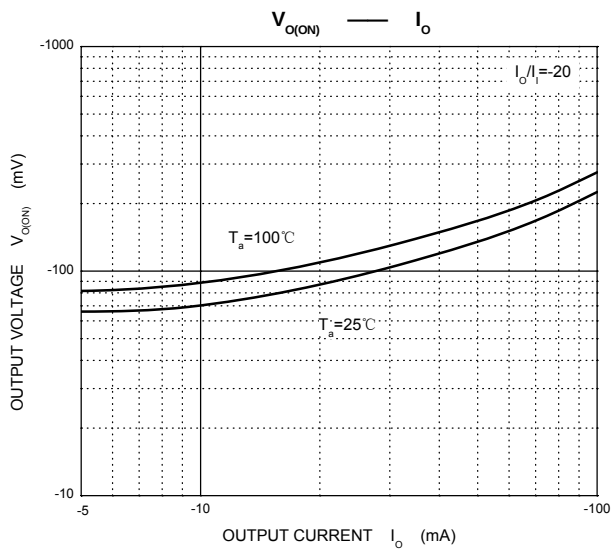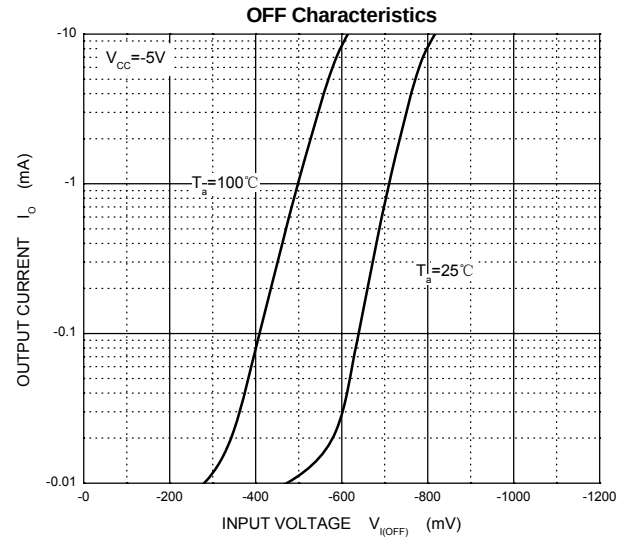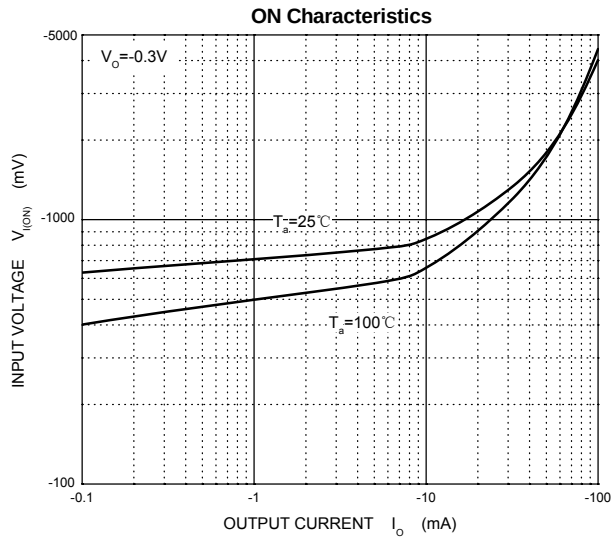


TO-92 Package Outline Dimensions

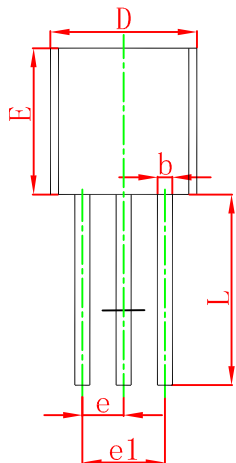

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

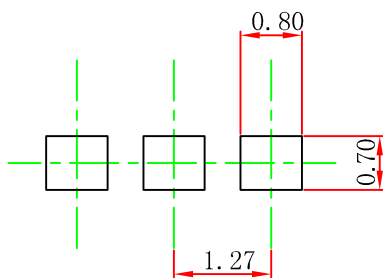


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE


JCET reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JCET does not assume any liability arising out of the application or use of any product described herein.

TO-92 PACKAGE TAPEING DIMENSION

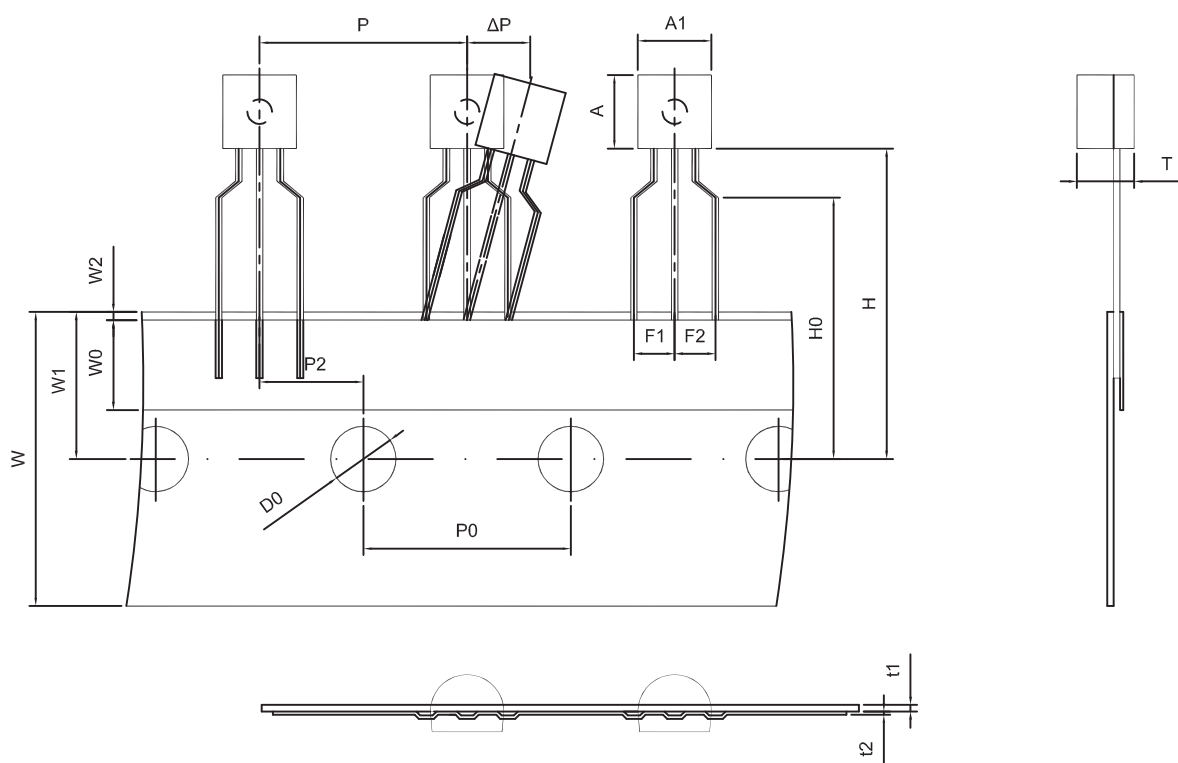

Dimiensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

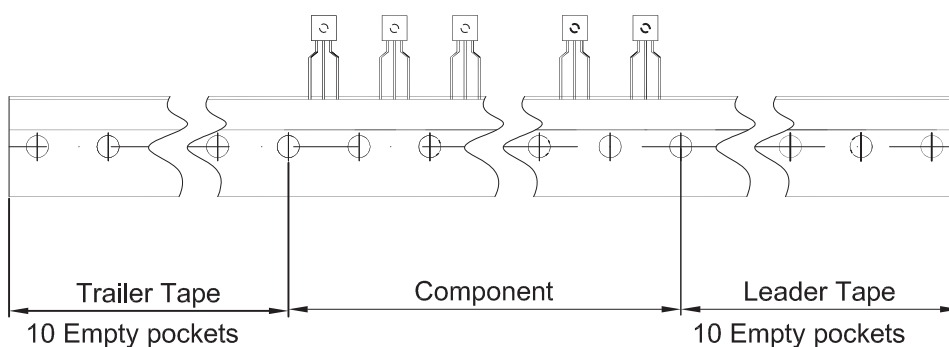

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250