


78L05

3-Terminal positive voltage regulator

Features

- Internal short-circuit current limiting
- Internal thermal overload protection
- Maximum output current of 100 mA ($T_j = 25^\circ\text{C}$)




1. Output 2. Common 3. Input
TO-92 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	35	V
Power Dissipation	P_{tot}	625	mW
Operating Temperature	T_{opr}	- 30 to + 75	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Electrical Characteristics (Unless otherwise specified, $V_{IN} = 10\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $T_j = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Output Voltage	V_{OUT}	4.8	5	5.2	V
Input Regulation $7\text{ V} \leq V_{IN} \leq 20\text{ V}$ $8\text{ V} \leq V_{IN} \leq 20\text{ V}$	Reg. line	-	55 45	150 100	mV
Load Regulation $1\text{ mA} \leq I_{OUT} \leq 100\text{ mA}$ $1\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	Reg. load	-	11 5	60 30	mV
Output Voltage $7\text{ V} \leq V_{IN} \leq 20\text{ V}$ $1\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	V_{OUT}	4.75	-	5.25	V
Output Voltage $V_{IN} = 10\text{ V}$ $1\text{ mA} \leq I_{OUT} \leq 70\text{ mA}$	V_{OUT}	4.75	-	5.25	V
Quiescent Current	I_B	-	3.1	6	mA
Quiescent Current Change $8\text{ V} \leq V_{IN} \leq 20\text{ V}$ $1\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	ΔI_B	-	-	1.5 0.1	mA
Output Noise Voltage at $T_a = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ KHz}$	V_{NO}	-	40	-	μV
Ripple Rejection at $f = 120\text{ Hz}$, $8\text{ V} \leq V_{IN} \leq 18\text{ V}$, $T_j = 25^\circ\text{C}$	RR	41	49	-	dB
Dropout Voltage at $T_j = 25^\circ\text{C}$	$ V_{IN} - V_{OUT} $	-	1.7	-	V
Average Temperature Coefficient of Output Voltage at $I_{OUT} = 5\text{ mA}$	TC_{VO}	-	-0.6	-	$\text{mV}/^\circ\text{C}$



SEMTECH ELECTRONICS LTD.



ISO 9001 : 2008
Certificate No. 16073009



ISO 14001 : 2004
Certificate No. 7116



ISO 9001 : 2008
Certificate No. 9079410



BS-OHSAS 18001 : 2007
Certificate No. 7116



IECQ QC 080000
Certificate No. PIC-18P4-1483

78L05

Fig.1 78L05 Output Voltage vs Ambient Temperature

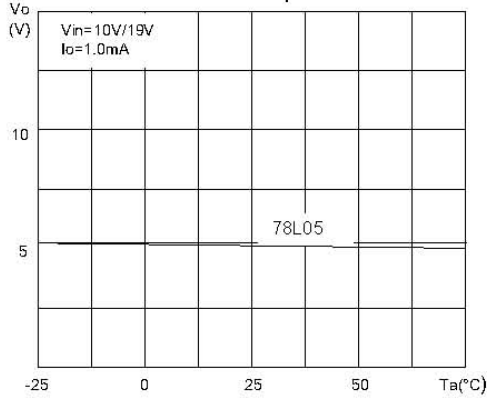


Fig.2 78L05 Quiescent Current vs Output Current

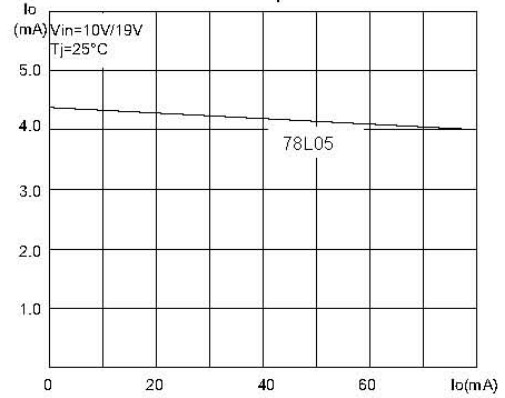


Fig.3 78L05 Quiescent Current vs Input

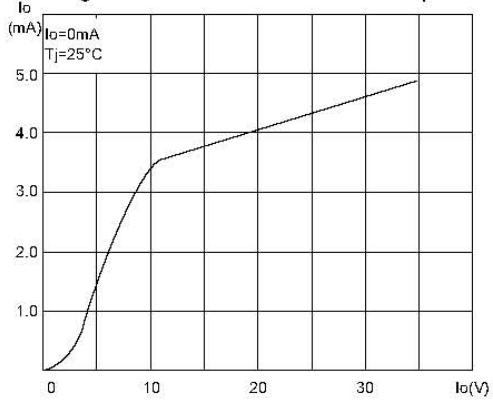


Fig.4 78L05 Thermal Shutdown

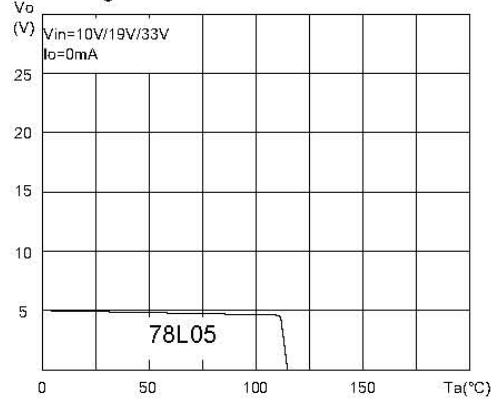


Fig.5 78L05 Output Characteristics



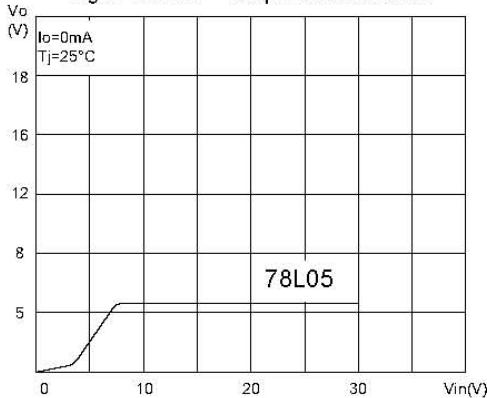


Fig.6 78L05 Dropout Characteristics



SEMTECH ELECTRONICS LTD.

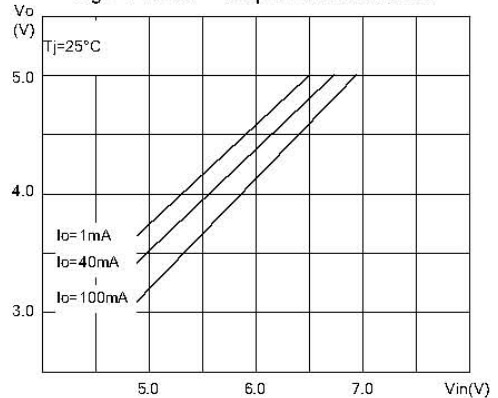

ISO 9001:2008 Certificate No. 16073009
 ISO 14001:2004 Certificate No. 7116
 ISO 9001:2008 Certificate No. 9079410
 BS OHSAS 18001:2007 Certificate No. 7116
 IECQ QC 080000 Certificate No. PRC-18P4-148-1