

FR1001CT THRU FR1007CT

GLASS PASSIVATED FAST RECOVERY RECTIFIER

REVERSE VOLTAGE: 50 to 1000 VOLTS

FORWARD CURRENT: 10.0 AMPERE

FEATURES

- Low forward voltage drop
- High current capability
- High capability
- High surge current capability

MECHANICAL DATA

Case: Molded plastic, TO-220


Epoxy: UL 94V-O rate flame retardant

Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.08ounce, 2.24gram

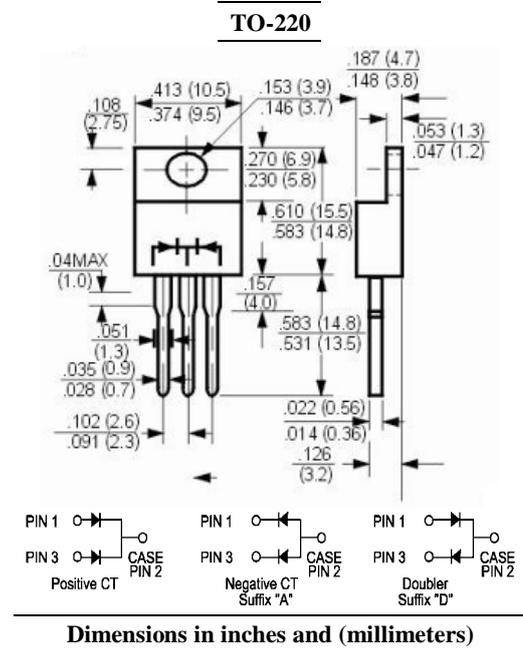

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	FR1001CT	FR1002CT	FR1003CT	FR1004CT	FR1005CT	FR1006CT	FR1007CT	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current See Fig. 2	$I_{(AV)}$	10.0							Amp	
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	125							Amp	
Maximum Forward Voltage at 5.0A DC and 25°C	V_F	1.3							Volts	
Maximum Reverse Current at Rated DC Blocking Voltage	I_R	at $T_C=25^\circ\text{C}$				5.0		at $T_C=125^\circ\text{C}$		uAmp
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	3							°C/W	
Maximum Reverse Recovery Time (Note 2)	T_{RR}	150				250		500		nS
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150							°C	

NOTES:

1- Thermal Resistance from Junction to Case per Leg Mounted on Heatsink.

2- Reverse Recovery Test Conditions: $I_F=.5A$, $I_R=1A$, $I_{RR}=.25A$.

FR1001CT THRU FR1007CT

GLASS PASSIVATED FAST RECOVERY RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

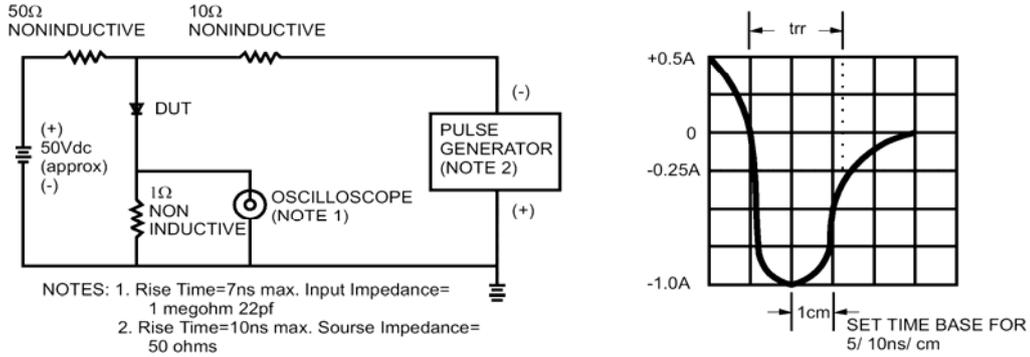


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

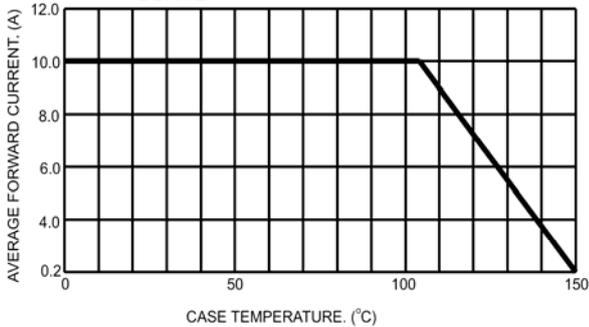


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

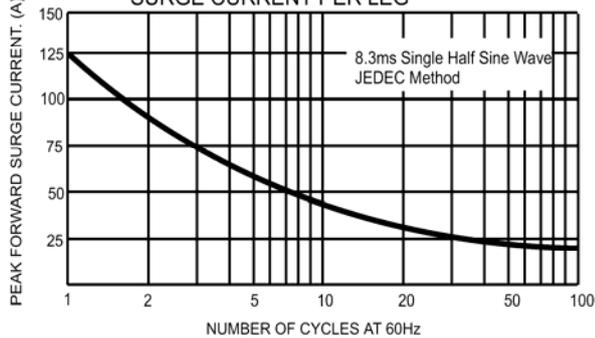


FIG.4- TYPICAL JUNCTION CAPACITANCE PER LEG

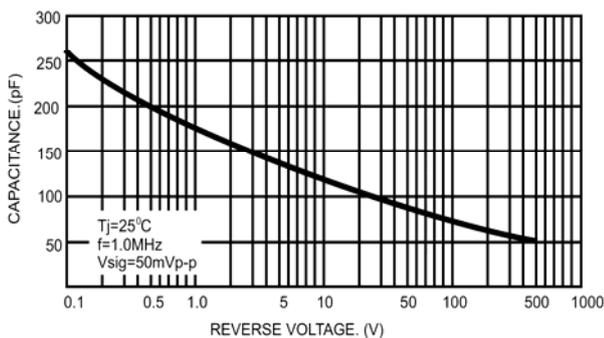


FIG.5- TYPICAL REVERSE CHARACTERISTICS PER LEG

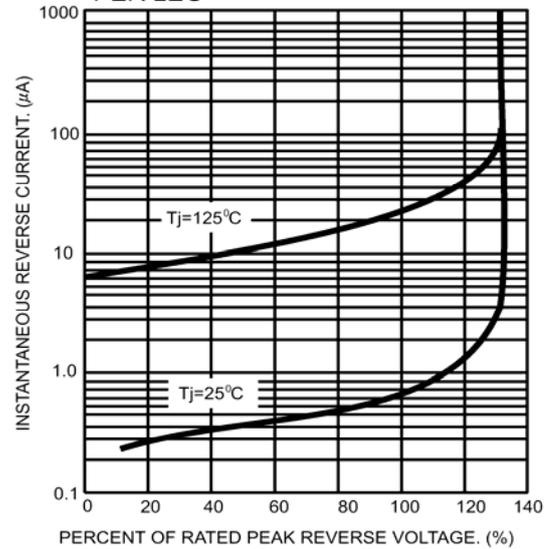


FIG.6- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

