


MMBTA42 / MMBTA43

NPN Silicon High Voltage Transistors

for high voltage switching and amplifier applications.




1. Base 2. Emitter 3. Collector
TO-236 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	300 200	V
Collector Emitter Voltage	V_{CEO}	300 200	V
Emitter Base Voltage	V_{EBO}	6	V
Collector Current	I_C	500	mA
Power Dissipation	P_{tot}	350	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Junction and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 10\text{ V}, I_C = 1\text{ mA}$ at $V_{CE} = 10\text{ V}, I_C = 10\text{ mA}$ at $V_{CE} = 10\text{ V}, I_C = 30\text{ mA}$	h_{FE} h_{FE} h_{FE}	25 80 40	- 200 -	- - -
Collector Base Cutoff Current at $V_{CB} = 200\text{ V}$ at $V_{CB} = 160\text{ V}$	I_{CBO} I_{CBO}	- -	0.1 0.1	μA
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$ at $V_{EB} = 4\text{ V}$	I_{EBO} I_{EBO}	- -	0.1 0.1	μA
Collector Base Breakdown Voltage at $I_C = 100\text{ }\mu\text{A}$	$V_{(BR)CBO}$ $V_{(BR)CBO}$	300 200	- -	V
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$	$V_{(BR)CEO}$ $V_{(BR)CEO}$	300 200	- -	V
Emitter Base Breakdown Voltage at $I_E = 100\text{ }\mu\text{A}$	$V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at $I_C = 20\text{ mA}, I_B = 2\text{ mA}$	$V_{CE(sat)}$	-	0.5	V
Base Emitter Saturation Voltage at $I_C = 20\text{ mA}, I_B = 2\text{ mA}$	$V_{BE(sat)}$	-	0.9	V
Gain Bandwidth Product at $V_{CE} = 20\text{ V}, I_C = 10\text{ mA}, f = 100\text{ MHz}$	f_T	50	-	MHz
Collector Output Capacitance at $V_{CB} = 20\text{ V}, f = 1\text{ MHz}$	C_{ob}	- -	3 4	pF



SEMTECH ELECTRONICS LTD.



ISO/TS 16949 : 2009 Certificate No. 180713000
ISO14001 : 2004 Certificate No. 7116
ISO 9001 : 2008 Certificate No. 90719410
BS-OHSAS 18001 : 2007 Certificate No. 7116
IECQ QC 080000 Certificate No. PRC-18P4-1483

MMBTA42 / MMBTA43

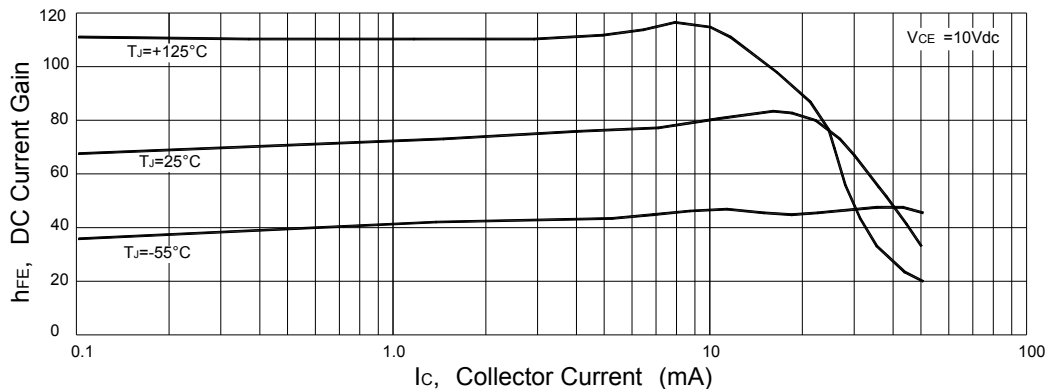


Figure 1. DC Current Gain

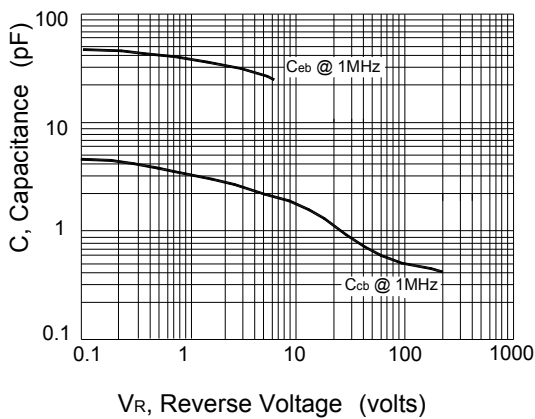


Figure 2. Capacitance

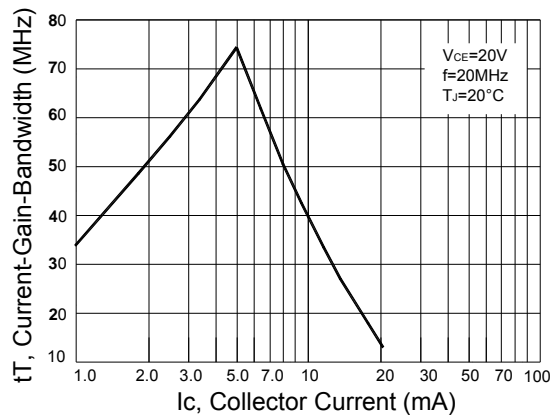


Figure 3. Current-Gain-Bandwidth


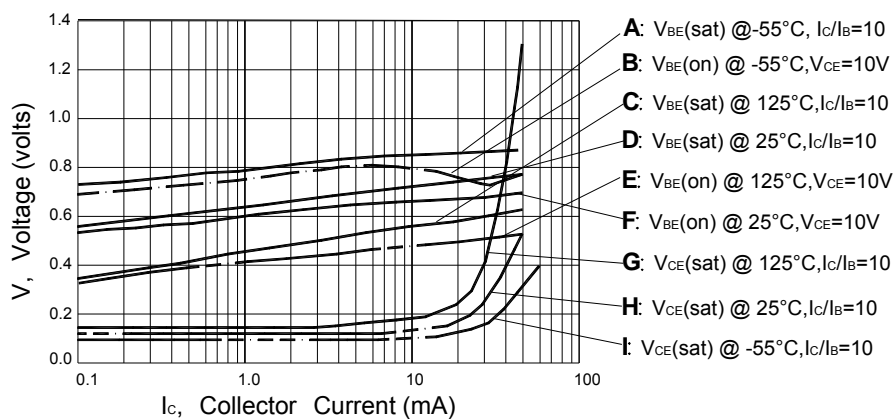


Figure 4. "on" Voltages



SEMTECH ELECTRONICS LTD.

