

# SR1020CT THRU SR10200CT

## SCHOTTKY BARRIER RECTIFIER

**REVERSE VOLTAGE:** 20 to 200 VOLTS

**FORWARD CURRENT:** 10.0 AMPERE



康比電子  
HORNBY ELECTRONIC

### FEATURES

- Plastic package has UL flammability classification 94V-0
- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- High capability
- Low power loss, high efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage, high frequency inverters, free whelling, and polarity protection applications

### MECHANICAL DATA

Case: Molded plastic, TO-220

Epoxy: UL 94V-O rate flame retardant


Terminals: Leads solderable per MIL-STD-202

method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.08ounce, 2.24gram

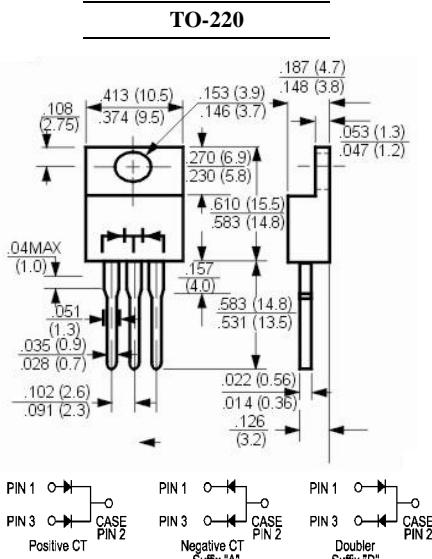

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR1020CT	SR1030CT	SR1040CT	SR1050CT	SR1060CT	SR1080CT	SR10100CT	SR10150CT	SR10200CT	Units
<b>Maximum Recurrent Peak Reverse Voltage</b>	$V_{RRM}$	20	30	40	50	60	80	100	150	200	Volts
<b>Maximum RMS Voltage</b>	$V_{RMS}$	14	21	28	35	42	56	70	105	140	Volts
<b>Maximum DC Blocking Voltage</b>	$V_{DC}$	20	30	40	50	60	80	100	150	200	Volts
<b>Maximum Average Forward Rectified Current See Fig. 1</b>	$I_{(AV)}$							10.0			Amp
<b>Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)</b>	$I_{FSM}$			175					150		Amp
<b>Maximum Forward Voltage at 5.0A DC and 25°C</b>	$V_F$		0.55		0.70		0.85		0.95		Volts
<b>Maximum Reverse Current at <math>T_C=25^\circ\text{C}</math> at Rated DC Blocking Voltage <math>T_C=100^\circ\text{C}</math></b>	$I_R$				0.5		50				mAmp
<b>Typical Junction Capacitance (Note 1)</b>	$C_J$		700				450				pF
<b>Typical Thermal Resistance (Note 2)</b>	$R_{\theta JC}$				3.0						°C/W
<b>Operating Temperature Range</b>	$T_J$		-55 to +125				-55 to +150				°C
<b>Storage Temperature Range</b>	Tstg						-55 to +150				°C

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance from Junction to Case Per Leg

# SR1020CT THRU SR10200CT

## SCHOTTKY BARRIER RECTIFIER



康比電子  
HORNBY ELECTRONIC

### RATINGS AND CHARACTERISTIC CURVES

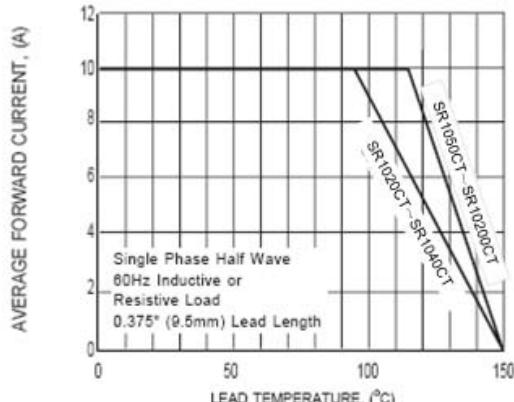


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

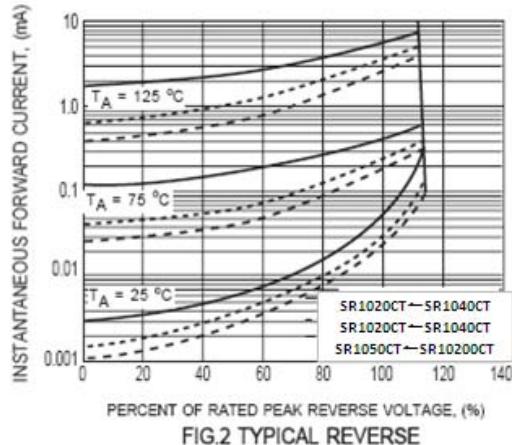


FIG.2 TYPICAL REVERSE CHARACTERISTICS

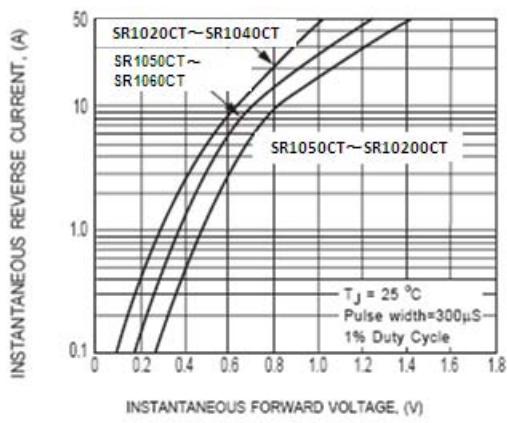


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

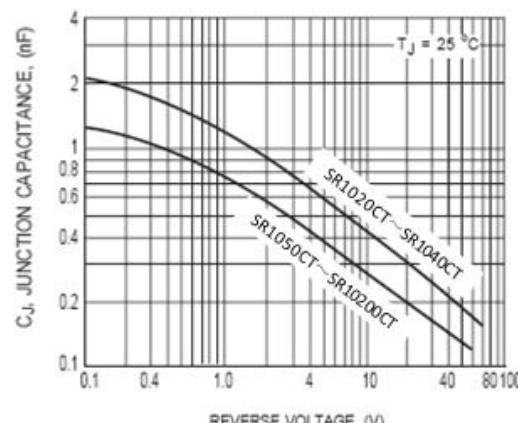


FIG.4 TYPICAL JUNCTION CAPACITANCE

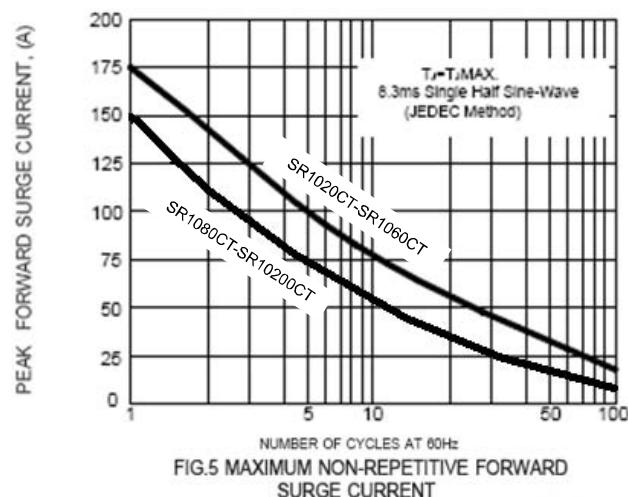


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT